


Free space PPLN Chip for CW Second Harmonic Generation (SHG)

Designed for Researchers who need 1-2W output power - a reliable way of SHG for Input wavelengths 1558nm-1562nm

- Simple to use
- Flexible over a range of Input powers up to 3.5 W
- Compatible with existing PV40 Oven
- Compatible with existing OC2 and OC3 Temperature controllers

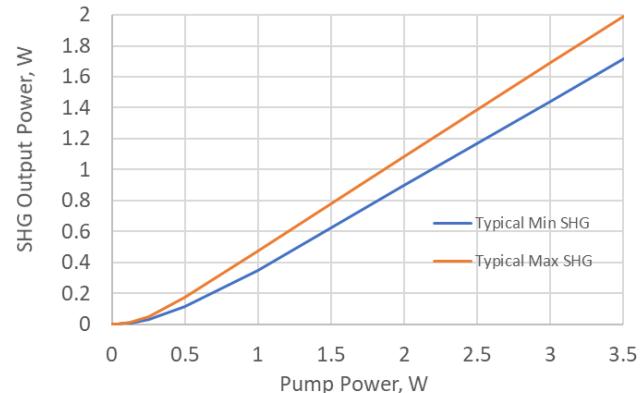



Specification		(same polarization)
Non-Linear Interaction		Type 0 (ee-e) no need for birefringence
Input Polarisation Alignment		e-pol (polarisation axis aligned to the crystal thickness)
Input wavelength range for SHG [nm] *		1558-1562
Output wavelength range [nm]*		779-781
Phase match temperature between [°C]		30 to 110
Recommended maximum CW pump launch [W]		3.5
CW SHG output @300mW Input [mW]		>35
Module efficiency (@300mW in) [%]		>12
MFD @1560nm (2nd moment) ±20%		x = ~10.0µm y = ~8.8µm
NA @1560nm ±20%		x = ~0.094, y = ~0.113
MFD @780nm (2nd moment) ±20%		x = ~9.9µm y = ~8.3µm
NA @780nm ±20%		x = 0.092, y = 0.085
End-facet AR Coating (Both Facets)		780nm/1560nm Dual Band
Chip Dimension [mm]		40 x 5 x 1, 5.35° Parallelogram
End Facet Angle (Relative to Waveguide Length)		5.35°

*Specifications are representative of typical product performance



Designed for Researchers who need 1-2W output power - a reliable way of SHG for Input wavelengths 1558nm-1562nm

Waveguide Chip WG-1560-40

Version 4.2 /2021

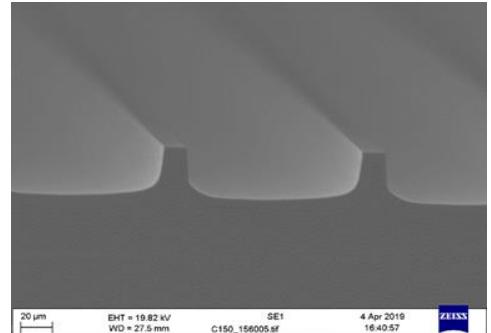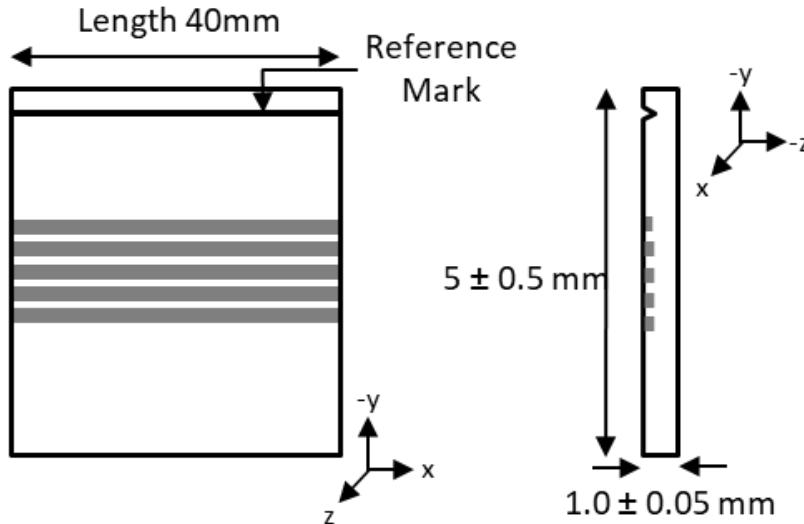

Side view Ridge waveguide

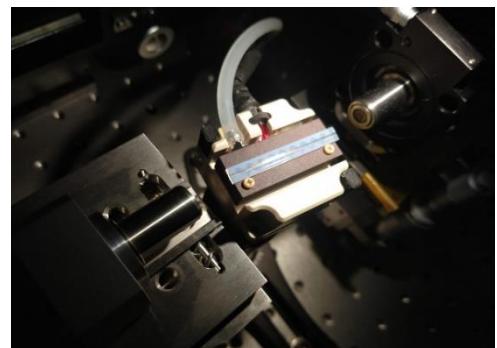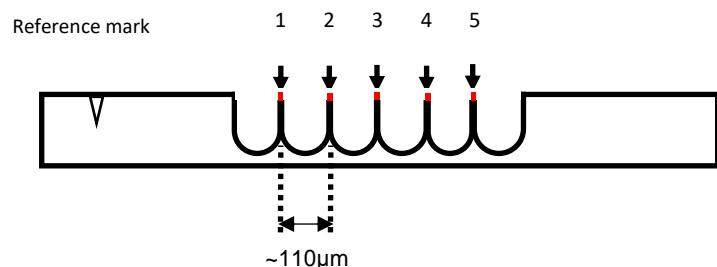

Accessories

OC3 Temperature Controller

PV40 Oven



Contact us to discuss availability and pricing

Email sales@coversion.com
Tel +44 (0)1794 521 638
Web www.coversion.com

 coversion